


SHC-C 鋼片聯軸器 / Plate Flexible Coupling

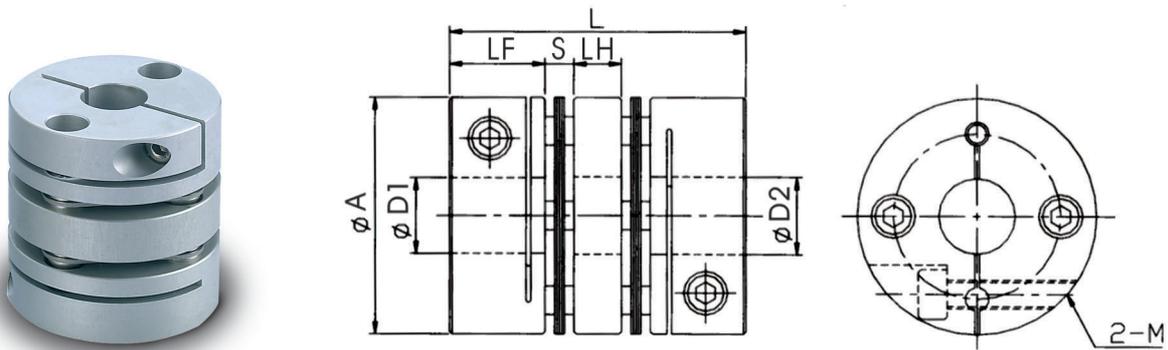

SHC- C- -

外徑 D1 D2

Diameter

◆尺寸表 / Dimension

單位/unit:mm

| 規格 No. | A | LF | S | LH | L | M | D1×D2/公差Tolerance(H8) | |
|-----------|----|------|-----|------|-------|----|-----------------------|-----|
| | | | | | | | min | max |
| SHC-27C | 27 | 10.8 | 2.9 | 7.5 | 34.9 | M3 | 5 | 10 |
| SHC-35C | 35 | 12 | 3 | 8 | 38 | M3 | 6 | 14 |
| SHC-40C | 40 | 15.5 | 3.3 | 10 | 47.6 | M4 | 8 | 16 |
| SHC-45C | 45 | 15.5 | 3.6 | 10 | 48.2 | M4 | 10 | 19 |
| SHC-56C | 56 | 20.5 | 4 | 13 | 62 | M5 | 12 | 25 |
| SHC-68C | 68 | 24.5 | 4.2 | 16 | 73.4 | M6 | 14 | 32 |
| SHC-82C | 82 | 29.8 | 8.8 | 21.5 | 98.7 | M8 | 19 | 35 |
| SHC-94C | 94 | 30 | 9.4 | 22 | 100.8 | M8 | 22 | 45 |

◆特性表 / Specification

| 規格 No. | 常用扭力 Rated Torque (N.m) | 最大扭力 Max. Torque (N.m) | 容許角度偏差 Allowable Angular Error | | | 最高轉速 Max. Rotational (rpm) | 慣性矩 Moment of Inertia (Kg.m ²) | 重量 Weight (g) |
|-----------|----------------------------------|---------------------------------|--|-------------------------------------|------------------------------------|-------------------------------------|---|---------------------|
| | | | 偏心 Error of Eccentricity (mm) | 偏角 Error of Angularity (o) | 軸向位移 Axial End- Play (mm) | | | |
| SHC-27C | 1.8 | 3.6 | 0.15 | 1 | ±0.33 | 10000 | 3.41×10 ⁻⁶ | 35.0 |
| SHC-35C | 4.0 | 8.0 | 0.17 | 1 | ±0.40 | 10000 | 11.3×10 ⁻⁶ | 62.0 |
| SHC-40C | 6.0 | 14.0 | 0.23 | 1 | ±0.50 | 10000 | 26.3×10 ⁻⁶ | 116.0 |
| SHC-45C | 10.0 | 20.0 | 0.23 | 1 | ±0.60 | 10000 | 41.7×10 ⁻⁶ | 131.0 |
| SHC-56C | 25.0 | 52.0 | 0.27 | 1 | ±0.80 | 10000 | 136.1×10 ⁻⁶ | 310.0 |
| SHC-68C | 60.0 | 124.0 | 0.31 | 1 | ±0.90 | 10000 | 366.9×10 ⁻⁶ | 365.0 |
| SHC-82C | 100.0 | 200.0 | 0.52 | 1 | ±1.10 | 10000 | 1070×10 ⁻⁶ | 1300.0 |
| SHC-94C | 180.0 | 360.0 | 0.50 | 1 | ±1.3 | 10000 | 1750×10 ⁻⁶ | 1500.0 |

◆特性 / Features

- 高剛性 / High Rigidity
- 適用於伺服馬達 / Applicable for Servo Motor
- 高扭力 / High Torque
- 緩衝材：不銹鋼彈片 / Buffer Material : Stainless
- 低慣性 / Low Moment of Inertia
- 固定方式：夾緊式 / Fix Type : Clamping
- 零背隙 / Backlash-free